

# SLIM-LINE DOWNLIGHT (230mm)

CTSLIM-20-230-NW



## KEY SPECIFICATIONS



20W  
POWER

5YR\*  
WARRANTY

EPISTAR  
LED's inside




OPAL  
DIFFUSER

2300  
LUMENS


TRIDONIC  
Driver as Standard

Specification	Downlight 230
System Power	20W
Driver Manufacturer	Tridonic
LED Chipset	Epistar
Diffuser	Opal
Colour Rendering Index	>85
Typical UGR	<19
LED Efficacy	115 Lm/cW
Lumen Output	2300Lm
Fire Rating	TP(α)
Dimmable	Contact Office
Power Factor	0.9
IP Rating	IP65
Beam Spread	90°
Colour Type	Single
Colour Temperature	4000K
Housing Material	High Grade 6063 Aluminium
Cut Out	200mm
Operating Temperature	-20 to 50 °C
Input Voltage	AC 200-240V, 50-60Hz
Weight	0.9kg
Dimensions	230mm x 28mm
MacAdam Step	2.8
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)

## TECHNICAL DRAWINGS

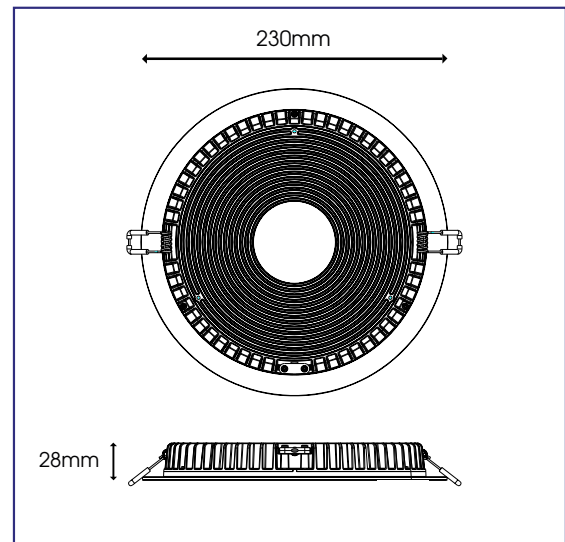

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

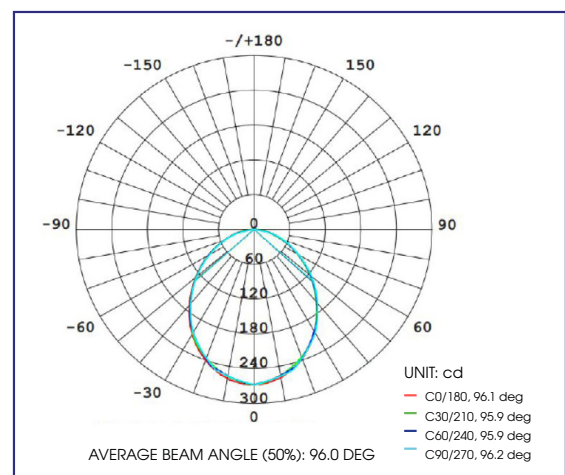

\* Warranty terms and conditions apply